

#2

367.39383X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): T. OJALA, et al  
Serial No.:  
Filed: December 8, 2000  
Title: A USER INTERFACE  
Group:

1c713 U.S. PTO  
09/732294  
12/08/00

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

December 8, 2000


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on United Kingdom Patent Application No.(s) 9929331.8 filed December 10, 1999.

A certified copy of said United Kingdom Application is attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



Carl I. Brundidge  
Registration No. 29,621


CIB/nac  
Attachment  
(703) 312-6600

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

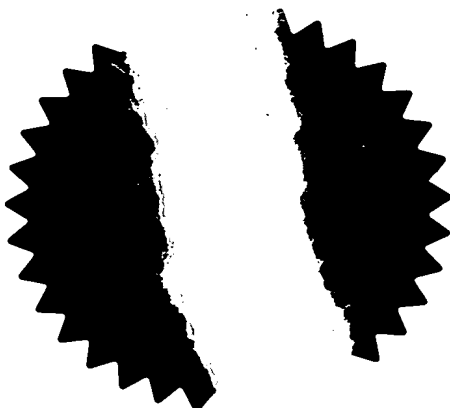


Signed 

Dated 24 October 2000

**THIS PAGE BLANK (USPTO)**

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

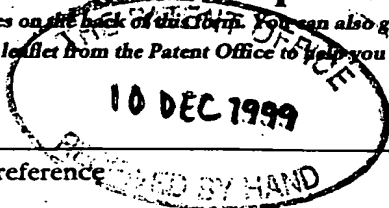

15DEC99 0498495-1 002716  
P01/7700 0.00-9929331.8  
The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference **PAT 99420 GB** **10 DEC 1999**

2. Patent application number  
(The Patent Office will fill in this part) **9929331.8**

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
  
NOKIA MOBILE PHONES LIMITED  
KEILALAHDENTIE 4  
02150 ESPOO  
FINLAND  
**5911995004**

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation  
FINLAND

4. Title of the invention  
A USER INTERFACE

5. Name of your agent (if you have one)  
  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
  
NOKIA IPR DEPARTMENT  
NOKIA HOUSE  
SUMMIT AVENUE  
FARNBOROUGH  
HAMPSHIRE  
GU14ONG UK  
**7577638001**

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

**YES**

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	12
Claim(s)	3
Abstract	1
Drawing(s)	3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1


Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

9/12/99

12. Name and daytime telephone number of person to contact in the United Kingdom

EAN DAVIES 01252 865000

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## A USER INTERFACE

PAT 99420 GB

This invention relates to a user interface for use particularly as part of a portable, or an in-vehicle (mobile) wireless telecommunications apparatus.

5

There is an ever-increasing demand to be able to access data from remote computers from anywhere via portable or mobile telecommunications devices. This is exemplified by the increase in the usage of WAP (Wireless Application Protocol). WAP allows users of mobile or portable phones to access specially  
10 designed WWW pages, and display them on the usually relatively small displays of their phones.

As display technology improves, and the price of displays drops, then it will become increasingly feasible to supply high-resolution pages of information to  
15 mobile or portable devices. This will be especially true for vehicle-mounted equipment where there is not such an emphasis on size constraints.

One of the advantages of the WWW is the manner in which one can easily jump from page to page via the use of so-called hypertext links. These can  
20 normally be identified from WWW pages by the use of a different coloured typeface and underlining. To activate the link and go to the referenced page, when using a PC, the user simply moves his mouse to correspondingly move the cursor over the link text, and clicks the mouse button. This sends a request to the remote computer to send the new page of information. By  
25 following links in this manner, it is relatively straightforward to navigate around complex sites using only the mouse, with little or no keyboard intervention.

However, when using a mobile (i.e. vehicle-mounted) or portable (i.e. carried by hand) device, the provision of a suitable mouse-like device can be difficult,  
30 and even if it can be provided, using it while driving, for instance, can be

dangerous. This problem can affect the ease with which the user can navigate the WWW, and consequently restricts the usefulness to the user of the WWW.

According to a first aspect of the present invention, a telecommunication apparatus for requesting the download of respective pages of received information from a remote source comprising means for receiving respective pages of information including encoded information identifying respective links to other pages; a display for displaying the received page; a fixed location input key, and a processor for consistently associating the input key with the encoded information identifying a respective linked page during a display period such that actuation of the input key during the display period requests the respective linked page for download from the remote source.

For the display period, the operation resulting from actuation of the input key can then uniquely be determined by the association between the key and the encoded information identifying a respective linked page.

Respective input keys may be associated with encoded information identifying respective linked pages. This allows selection of a plurality of links on a page simply and quickly.

The key may be dedicated to this task.

Alternatively, the key may have other functions, depending on the mode of the apparatus. Particularly, it may be one of a group of keys provided for dialing.

Another alternative implementation of the user operable input means is the provision of a touch sensitive area on the display of the apparatus.



The remote source from which pages are downloaded is preferably capable of connection to the World Wide Web (WWW).

5 The page of information is preferably encoded using a markup language such as HTML or WML. This is then presented to the user in a manner controlled by the particular encoding used for each page.

The link to a linked page is preferably provided by means of a specific tag in the encoded page.

10

In a preferred embodiment, each page of information comprises a plurality of links to respective linked pages. Each link is associated with a respective input means.

15 According to a second aspect of the present invention, there is provided a method of requesting the download of respective pages of received information from a remote source comprising receiving respective pages of information including encoded information identifying respective linked other pages, the encoded information including a functional element for consistently  
20 associating operation of an identified input device with a request for download of the linked page, and a visual element for labelling the operation the method comprising the steps separating the labelling and functional elements of the encoded information; displaying the labelling information at a predefined position and defining the function of the identified input device using the  
25 functional element of the encoded information such that on operation of the input device the respective linked page is requested for download.

In this aspect of the invention the defined function of the identified input device can then be consistently associated with the input device. The input device is  
30 preferably a fixed location input key.

For a better understanding of the present invention, and to understand how the same may be brought into effect, the invention will now be described, by way of example only, with reference to the appended drawings in which:

5

Figure 1 shows an in-vehicle apparatus according to a first embodiment of the invention;

10

Figure 2 shows a functional block diagram of some of the constituent parts of the embodiment of Figure 1;

Figure 3 shows an example display on the apparatus of Figure 1;

15

Figure 4 shows an in-vehicle apparatus according to another embodiment of the invention; and

Figure 5 shows a portable (i.e. handheld) apparatus according to a further embodiment of the invention.

20

Figure 1 shows a front panel of a mobile, or in-vehicle, telecommunications apparatus 10. The apparatus is intended to be permanently fixed in a vehicle, and not to be removed, and carried around by the user.

Such an apparatus is an example of an enhanced in-vehicle radio telephone.

25

The enhancement lies in its ability to communicate with remote computer systems e.g. computers providing WWW pages, computers providing route guidance/navigation information.

Figure 1 does not show a handset, as is normally used with in-vehicle telephones. However, a handset may be provided, as well as a separate speaker and microphone to allow hands free operation.

- 5 Figure 1 shows a number of Input/Output (I/O) devices which may be used to control the operation of the apparatus. A standard set of alphanumeric dialling keys 105 are provided. Their primary function is to allow entry of telephone numbers for dialling. They may also have a secondary function allowing entry of alphabetic information by means of certain letters being associated with  
10 each key as has become common. e.g. 2=ABC, 3=DEF, 4=GHI etc.

A rotary input device 110 is also provided. This may have a different function depending on what function the apparatus is performing at any given time. For instance, if the apparatus is operating in hands free telephone mode, the  
15 rotary control 110 may act as a volume control for an external loudspeaker. If the user is browsing through a list of stored telephone numbers, the rotary control 110 may allow scrolling up and down the list.

A display 115 provides a means of providing visual information to the user of  
20 the apparatus. If the apparatus is operating in a route guidance mode, the display may present information about upcoming changes of direction. e.g. a large right-pointing arrow with the legend "Turn Right in 50 metres". If the user is accessing WWW pages, they will appear on the display device.

25 A number of function buttons 120 may be provided. A key may be provided to select each function of the apparatus. For instance, a key may be provided to select the Route Guidance function, another for WWW access, another for telephone mode and so on.

Cursor control keys 130 are provided to assist the user in entering or editing data. They may also be used to scroll through lists or pages of information.

Embodiments according to the invention provide shortcut keys 125 to assist  
5 the user in navigating pages of information provided by, or downloaded from, a remote computer. An example of the kind of information which may be provided is pages of HTML (Hypertext Markup Language) encoded information from the WWW. Another example of the kind of information which  
10 may be provided is pages of WML (Wireless Markup Language). The device may be compatible with the WAP (Wireless Application Protocol) standard.

Figure 2 shows a functional block diagram of some of the parts of the apparatus  
10. At the heart of the system is the micro-processor system 205. This comprises a micro-processor device and the associated circuitry which the  
15 skilled man will realise is necessary to implement such a system e.g. RAM, ROM and power supply.

The micro-processor system is functionally connected to the display 210 and  
20 provides control signals to drive the display, and hence provide visual information to the user.

Also connected to the micro-processor system is the keyboard 215. This  
comprises all the keys and rotary input devices on the control panel of the  
apparatus. The keyboard may also comprise other types of input device such  
25 as a roller key, a rocker key or a joystick. The micro-processor system senses actuation of any key and performs the associated function according to its program code.

The Audio I/O 220 comprises the handset, if present, and the speaker and microphone necessary for hands free operation. Speech recognition and/or synthesis may also be provided.

- 5 The telephone function 225 is essentially a portable radio telephone as is known in the art, supplemented with a Modem to allow the transmission and reception of data. The telephone function may of course allow the apparatus to be used as a regular telephone.
- 10 The Application interface block 230 controls the interface to any peripheral functional blocks 235. These are not important in the understanding of the present invention, but as an example may comprise a GPS module for use with the route guidance system, an in-car entertainment system or extra programs for use in storing telephone numbers or contact details.
- 15 One of the primary uses of such apparatus will be to access WWW pages. These WWW pages are usually stored on a remote computer, and the user may request that a particular page be transferred from the remote computer to a temporary store within his local computer, and then displayed. WWW pages
- 20 comprise information to be displayed, marked up in accordance with rules which define the appearance of the text. These rules are defined in various HTML (Hyper Text Markup Language) specifications. The processor contains a markup language decoder, which interprets the received page. HTML is a simple coding system which controls how text is displayed and formatted on a
- 25 display. Similarly, WML (Wireless Markup Language) may be used to define the pages. For instance, if a word is to appear in bold type face, then it may be encoded:

<BOLD> EXAMPLE TEXT </BOLD>

This will display the words 'EXAMPLE TEXT' in bold. The text qualifiers in angle brackets are called tags, and there a number of such tags which perform different functions in HTML. They all appear in angle brackets, and their functionality is ended by use of a forward slash as shown in the example.

5

A particular tag used in HTML is the anchor tag. This is used to identify a link to another page. Moving the cursor over the highlighted text will send a request to the remote computer to send the new page referenced by the anchor text. An example of such a link, and the coding producing it is given here:

10

For more information, click here. (Text as it appears on the display)

The underlying HTML code required to produce this display is:

15 For more information, <A HREF="HTTP://WWW.NOKIA.COM"> click here. </A>

The anchor tag pair <A> </A> surrounds only the words 'click here', and so only those words are shown underlined on the screen, and in turn are the only words which are related to the link encoded in the HTML.

20

In a regular PC environment, the user will simply move his cursor over the words 'click here', click the mouse button and the linked page referenced in the HTML, i.e. the Nokia Home Page in this example, will be sent to the user in response to the request.

25

However, as stated before, it is difficult to provide a suitable pointing device in a vehicular or portable environment, and so a different approach is needed to allow the user to follow links from one WWW page to the next.

30

An embodiment according to the invention provides a number of keys, each of which is associated with one of the links presented on a page of information. By actuating one of the keys, the user can then request the linked page specified by that particular link to be sent to him in the same way as if he had been able to select the link using a mouse and cursor. The key may, for example, be a rocker key, joystick or a roller key as described earlier.

In a preferred embodiment, the keys are dedicated keys situated under the display. In the example shown in Figure 1, five separate shortcut keys 125 are shown, but it is clear that any number may be provided. The keys could, however, be linked to form, for example, a multi-way rocker.

In order to associate each link with a key, it is necessary to introduce a new tag into HTML or WML. It is not important what the tag is called, but for the sake of clarity, and as an example only, the tag will herein be called **SHORTCUT**.

The proposed syntax for such a tag is:

```
<SHORTCUT KEYNUM={N} ACTION={URL} CAPTION={TEXT}>
```

All three arguments are mandatory, and there are no additional optional arguments.

KEYNUM identifies which of the shortcut keys is to be associated with the link.

The keys may be numbered from the left, starting at 1, although this may be specified by the manufacturer of a particular terminal.

ACTION defines the location or URL (Uniform Resource Locator) of the link which is to be followed if the key is pressed.

CAPTION defines the text which will be displayed at the bottom of the display, immediately above the respective shortcut key. It will normally be a more meaningful description of the linked page that is provided by the URL. For instance, a typical line of HTML using this structure might read :

5

```
<SHORTCUT KEYNUM=1 URL="HTTP://WWW.NOKIA.COM" CAPTION="NOKIA
HOME PAGE">
```

Alternatively, CAPTION may define a graphic image which is used to represent the link to the linked page. For instance, instead of the CAPTION argument reading CAPTION = "NOKIA HOME PAGE" as above, the caption could be an image of the NOKIA logo i.e. CAPTION=/IMGS/LOGOS/NOKIA.GIF. Note that the file location which replaces the text to be displayed is not enclosed in quotation marks.

15

It is envisaged that as many such statements as there are shortcut keys will be used, although of course, there may be fewer links on a page than there are shortcut keys provided. However, if there are more links on a page than shortcut keys provided one of the keys could be used to change the consistent association to allow additional links to be available.

20

Figure 3 shows the display 115 and shortcut keys 125 as they would appear when a suitably coded page of information is displayed. In this example, the user wishes to discover more about intellectual property. The view shown is the title page of a further set of pages, and the links presented at the bottom of the display offer the user the choice of pressing key 125a for Patents, 125b for Trade Marks, 125c for Copyright, 125d for Designs or 125e to return to the previous page.

25

It is envisaged that content providers will produce specialised pages designed to be viewed on portable and mobile apparatus, which will contain the specially

30



coded shortcut tags. Such pages may have less information on them than pages designed to be viewed using a regular PC, but they offer the added benefit of ease of navigation while on the move, or using an apparatus having a display of restricted size.

5

In an alternative embodiment, dedicated shortcut keys need not be provided. Instead, the alphanumeric keys 105 of the regular telephone keypad may be used. In this embodiment, the links may simply be numbered with the appropriate key then being pressed to access that link. While this option  
10 reduces the overall number of keys on the apparatus, it does not have the advantage of being able to place a concise description of the link in close proximity to the associated key.

In a further embodiment, as shown in Figure 4, use may be made of touch  
15 screen technology. Instead of providing keys below the display 415, the functionality of such keys can be built into the display. A discrete area of the display is set aside for such inputs as shown in Figure 4 which shows 5 areas 425 of the display sensitive to touch. The appropriate link text caption is simply displayed co-located with the touch sensitive areas. The user can then simply  
20 touch the caption corresponding with the link he wishes to follow to send a request for the appropriate page to be sent to him.

The invention is not limited to use in only mobile wireless apparatus. It enjoys equal utility in portable, i.e. handheld, devices. Figure 5 shows how the  
25 invention may be employed in a slightly different form in a portable apparatus 500. In this case, the apparatus is shown with all the regular parts of a portable telephone, but with the addition of 4 shortcut keys 525. Again, more or fewer shortcut keys may be provided – four being only an exemplary embodiment. In operation they function exactly as has been described in relation to the mobile  
30 apparatus.

In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

The present invention includes any novel feature or combination of features  
5 disclosed herein either explicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

**CLAIMS**

1. A telecommunication apparatus for requesting the download of respective pages of received information from a remote source comprising:
  - 5 means for receiving respective pages of information including encoded information identifying respective links to other pages;  
  
a display for displaying the received page;
  - 10 a fixed location input key, and  
  
a processor for consistently associating the input key with the encoded information identifying a respective linked page during a display period such that actuation of the input key during the display period requests the respective  
15 linked page for download from the remote source.
2. A telecommunication apparatus according to claim 1 comprising respective fixed location input keys and wherein the processor associates each input key with the encoded information identifying a respective linked page.  
20
3. A telecommunication apparatus according to claim 1 or claim 2 wherein the display period is the duration of the display of the received page.
4. A telecommunication apparatus as claimed in any of claims 1 to 3  
25 wherein the input key is a dedicated key.
5. A telecommunication apparatus as claimed in claim 4 wherein the dedicated key is one of a group of alphanumeric keys provided for dialing.

6. A telecommunication apparatus as claimed in any of claims 1 to 3 wherein the input key is a touch-sensitive area of the display.

7. A telecommunication apparatus as claimed in any one of the preceding  
5 claims wherein a caption indicative of the linked page is provided in close proximity to the input key.

8. A telecommunication apparatus as claimed in claim 7 wherein the caption is provided immediately above the input key.

10

9. A telecommunication apparatus as claimed in any one of the preceding claims wherein the remote source is a computer capable of connection to the World Wide Web (WWW).

15 10. A telecommunication apparatus as claimed in any one of the preceding claims wherein the apparatus comprises a markup language decoder.

11. A telecommunication apparatus as claimed in any one of the preceding claims wherein the association between the user-operable input means and the  
20 link is achieved by means of a particular tag in the page of information.

12. A telecommunication apparatus as claimed in any one of the preceding claims wherein the apparatus is arranged to be mountable in a vehicle.

25 13. A telecommunication apparatus as claimed in any one of claims 1 to 11 wherein the apparatus is a portable wireless telecommunication apparatus.

14. A method of requesting the download of respective pages of received information from a remote source comprising

30

receiving respective pages of information including encoded information

identifying respective linked other pages, the encoded information including a functional element for consistently associating operation of an identified input device with a request for download of the linked page, and a visual element for labelling the operation;

separating the labelling and functional elements of the encoded information;

10 displaying the labelling information at a predefined position and

defining the function of the identified input device using the functional element of the encoded information such that on operation of the input device the respective linked page is requested for download.

15

15. A telecommunication apparatus as hereinbefore described with particular reference to one or more of the figures, either alone or in combination.

16. A method as hereinbefore described with particular reference to one or more of the figures, either alone or in combination.

20

**ABSTRACT**

An apparatus and associated method is disclosed for receiving a page of information from a remote source. The page contains a link to a linked page of information, and is displayed on a display. The apparatus is equipped with a user operable input device associated with the link. Actuation of the input device causes a request to be sent for the linked page to be transmitted to the apparatus.

10 Fig. 1

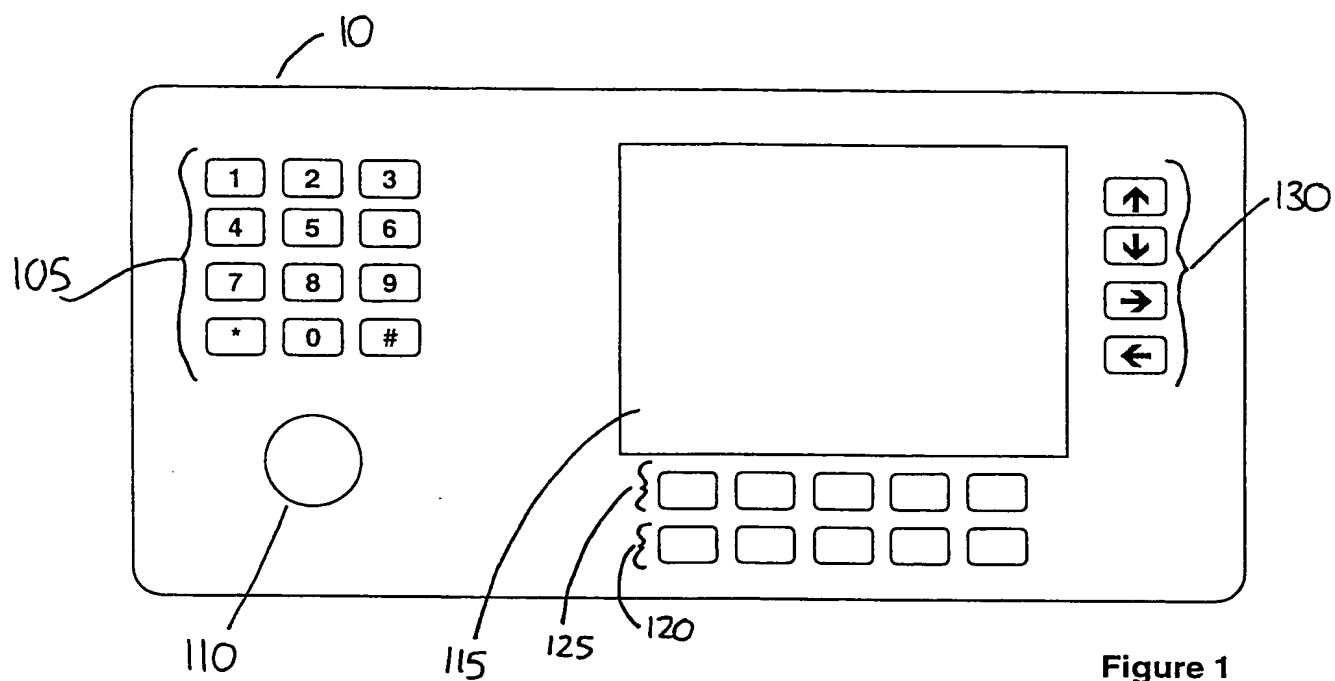


Figure 1

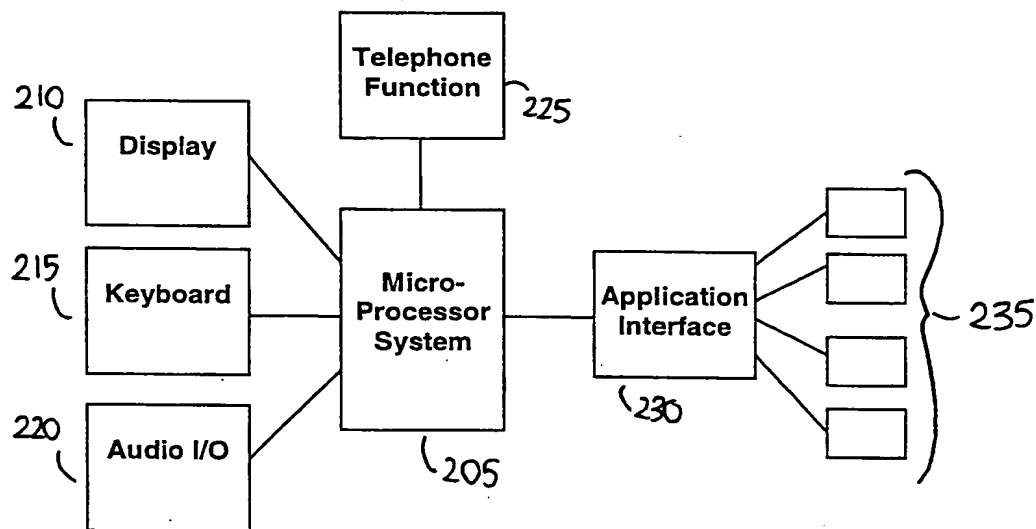


Figure 2

**THIS PAGE BLANK (USPTO)**



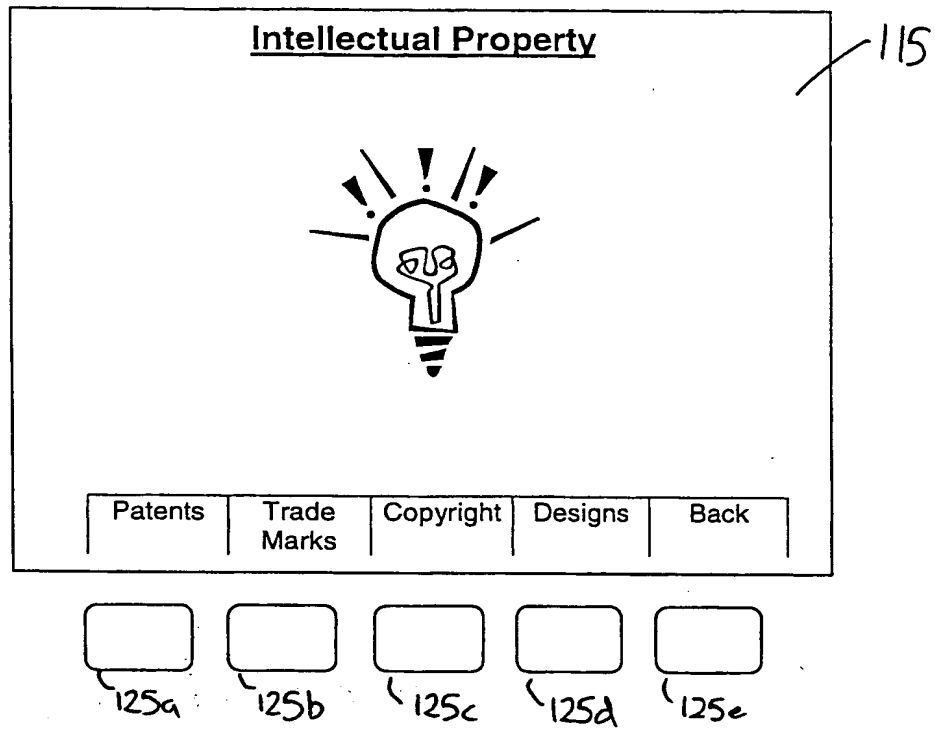


Figure 3

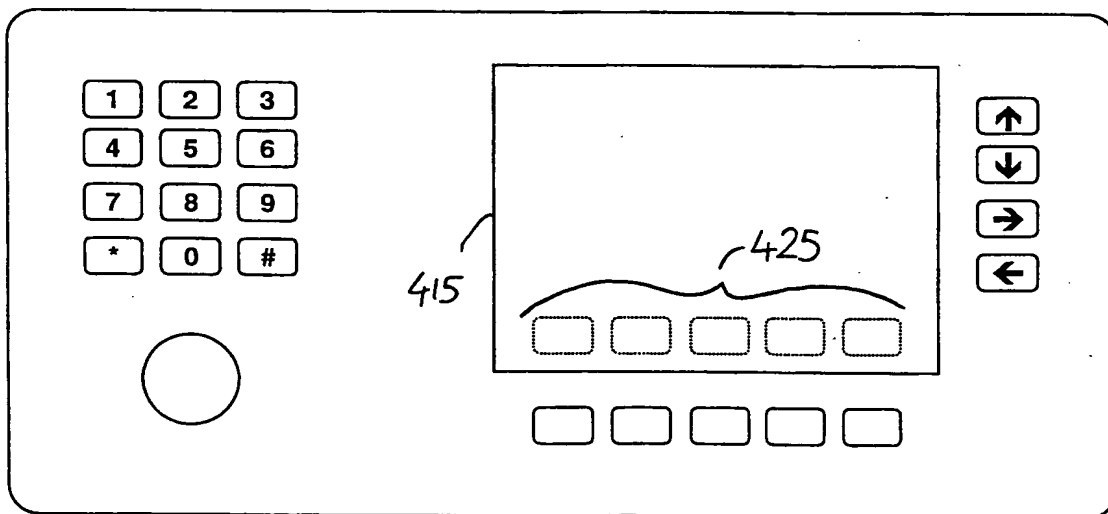


Figure 4

**THIS PAGE BLANK (USPTO)**

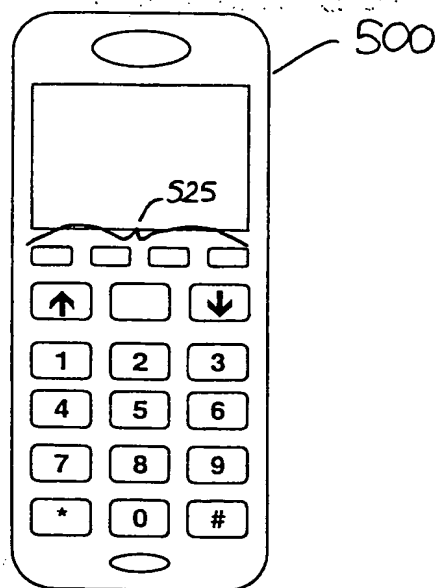


Figure 5

**THIS PAGE BLANK (USPTO)**